INSTALLATION INSTRUCTION FOR 1424

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER

PREPARATION

1. Shut off power at the fuse box or circuit breaker box. If necessary. Remove old fixture and all mounting hardware from wall junction box.
2. Carefully unpack your new fixture and lay out all the parts on a clear area. Take not to loose any small parts necessary for installation.

ASSEMBLING THE FIXTURE

3. Spread the arms (E1) so that the arms (E1) are at equal distance from each other.
4. Thread the nut (G) onto the nipple (H), then thread the nipple (H) into the coupling (F) and tighten with the nut (G).
5. Slide the tube (I), cap (K), iron washer (L), plastic washer (M), glass (J), plastic washer (N) and iron washer (O) over the nipple (H) and secure with the nut (P).
6. Slide the cap (Q) over the nipple (H), and secure with the finial (R).

MOUNTING THE FIXTURE (FIG.1)

7. Thread the two mounting screws (C) part way into the circular strap (A). Secure the circular strap (A) to junction box (not provided) with the junction box screws (B) through slotted holes in circular strap (A).

CONNECTING THE WIRES (Fig. 2)

8. Connect the fixture wires to the junction box wires as shown in Fig. 2. Make sure all wire connectors are secure and do not easily pull off with a slight tug. If there is no Green Ground Wire from the junction box, connect the Fixture Ground Wire to the Circular Strap or the Mounting bar with the Green Screw provided.
9. Tuck these wire connections neatly into the ceiling junction box.
10. Raise the canopy (D) allowing for the mounting screws (C) to protrude through the holes on the canopy (D), then secure with the finials (E).

COMPLETING THE INSTALLATION

11. Install the proper light bulbs for your fixture.

DO NOT EXCEED THE SPECIFIED WATTAGE!

Return the power to the junction box and test the fixture. Your installation is now complete.

FIG.1

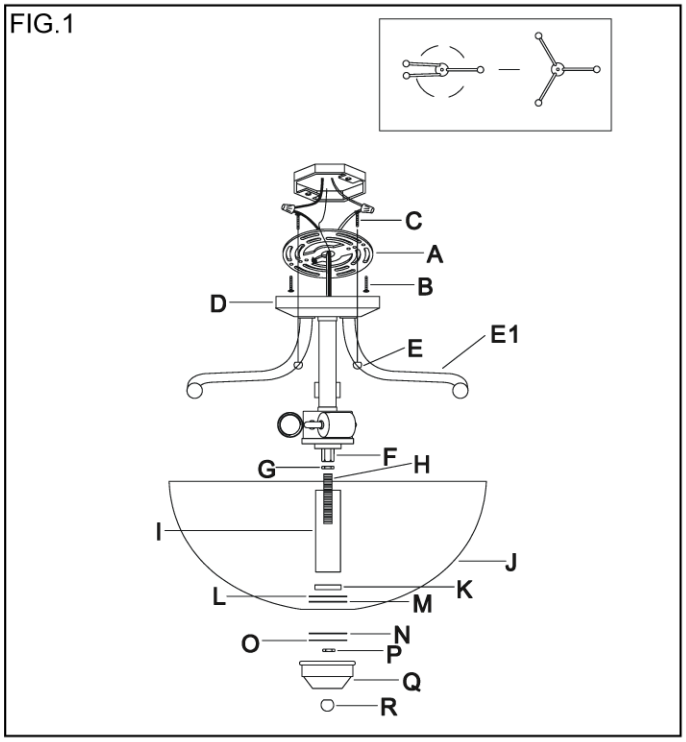

Fig.2

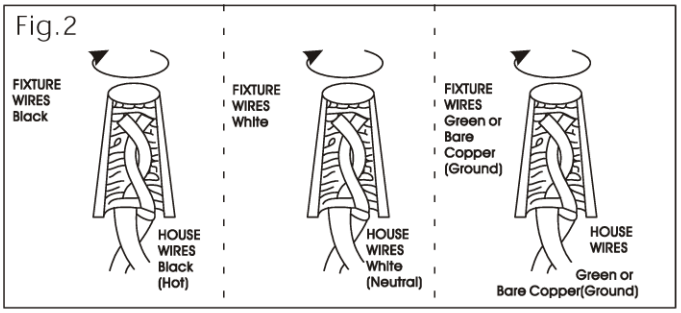
FIXTURE WIRES Black
HOUSE WIRES Black (Hot)
FIXTURE WIRES White
HOUSE WIRES White (Neutral)
FIXTURE WIRES Green or Bare Copper (Ground)
HOUSE WIRES Green or Bare Copper(Ground)

UL LISTED
american lighting association